





برای پیکربندی مودم دی لینک مدل DIR 615 مراحل زیر را به ترتیب انجام دهید:


اگر به هر دلیلی مودم شما ریست شد یا کانفیگ آن از دست رفت از طریق آدرس پیش فرض وارد محیط پیکربندی مودم شوید. در اغلب مودم‌ها این آدرس ۱۹۲,۱۶۸,۱,۱ یا ۱۹۲,۱۶۸,۰,۱ است.

۱- بعد از لاگین اگر مودم شما ریست شده باشد نیازی به انجام این مرحله ندارید، اما اگر کانفیگ از بین رفته بود روی گزینه Initial Configuration کلیک کنید. با انتخاب این گزینه وارد مراحل پیکربندی مودم می‌شوید.

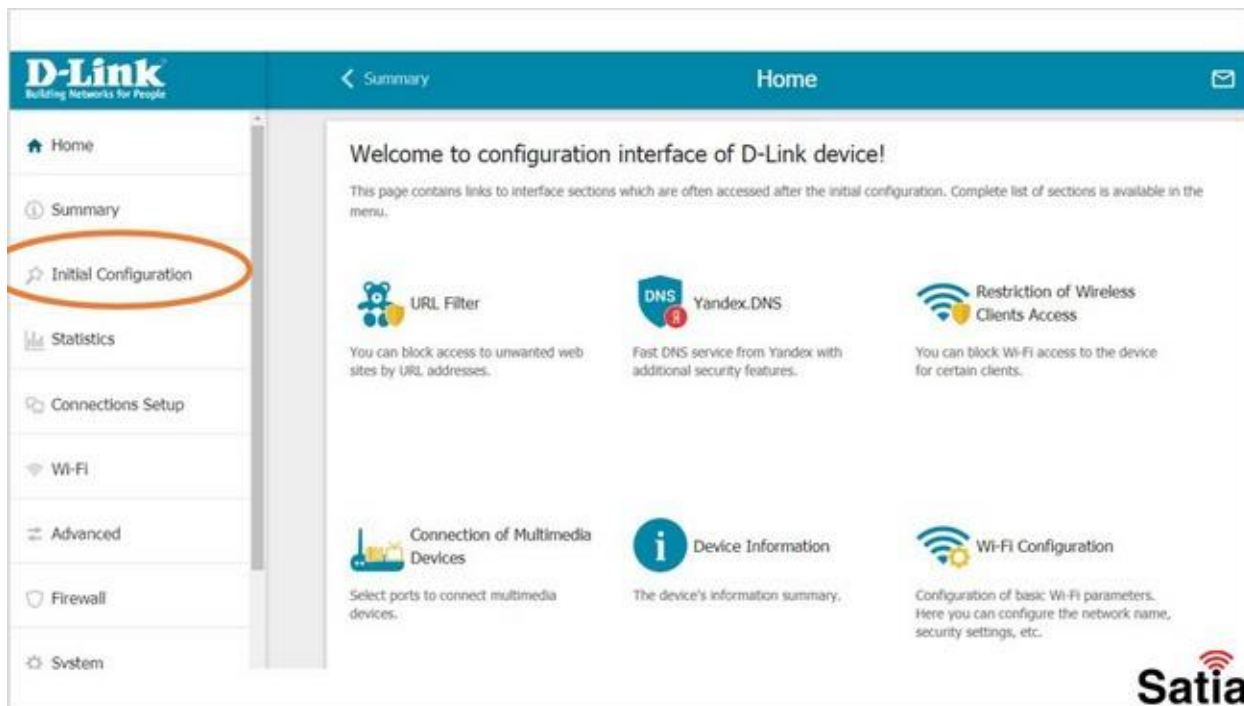


۲- در سه مرحله بعدی مانند تصاویر زیر به ترتیب دکمه‌های Start و Yes و سپس Continue را انتخاب نمایید.

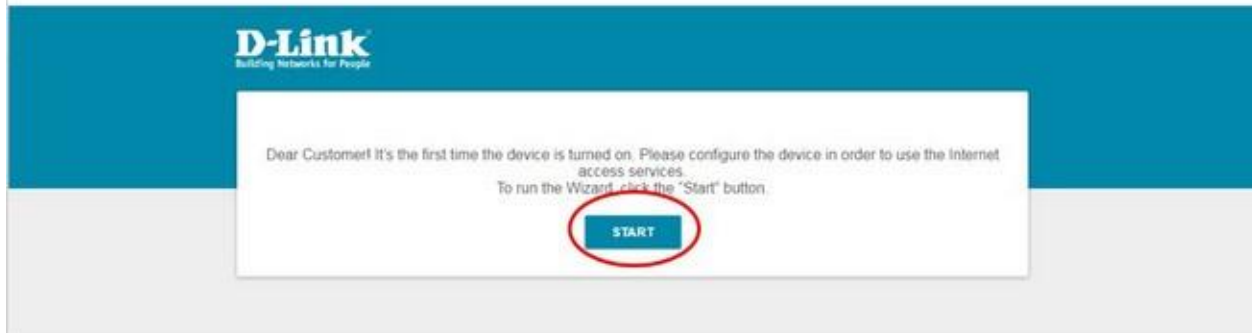


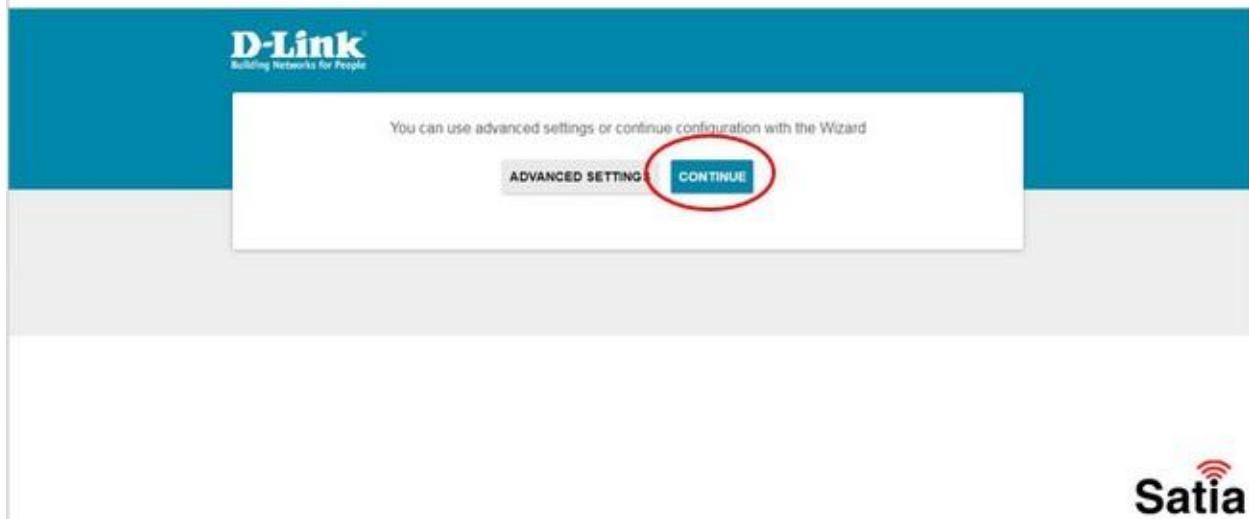


۳- در صفحه جدید از قسمت Connection Method گزینه Wi-Fi و از بخش Work Mode گزینه WISP Repeater را انتخاب کنید. در انتها روی دکمه Next کلیک کنید.

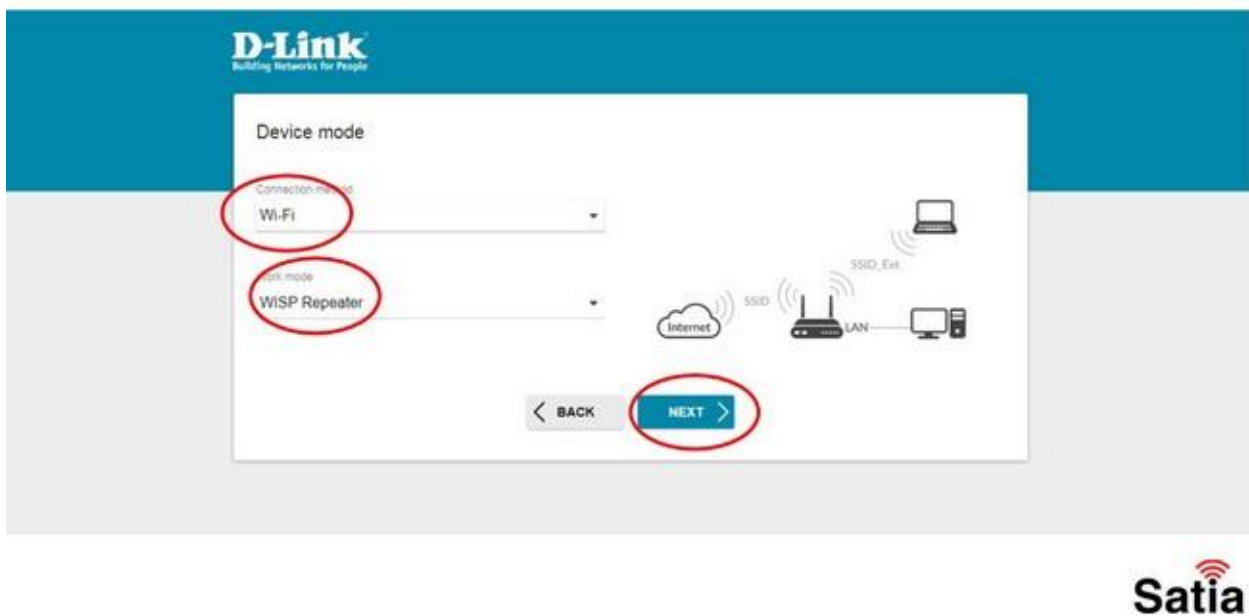



۴- در این گام اسکن دکل‌های روستا انجام می‌شود. با توجه به لیست، قوی‌ترین آنتن را انتخاب و کلمه عبور (رمز) آن را وارد نمایید.

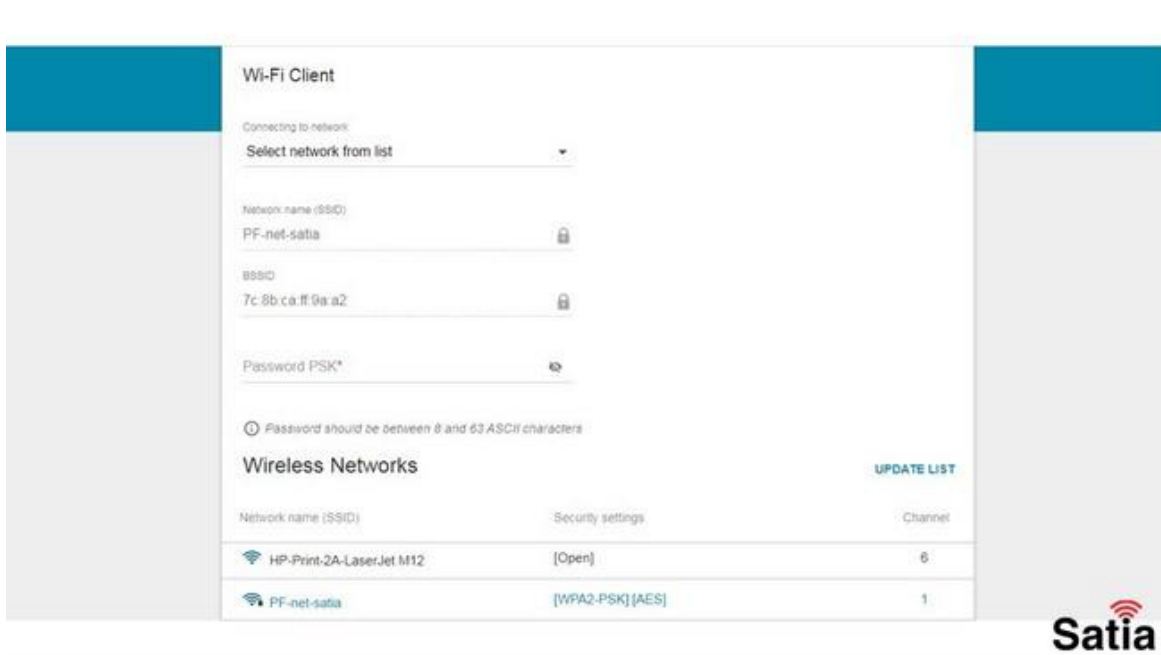


۵- حال نام مودم و کلمه عبور را مطابق تصویر انتخاب کرده و در انتهای صفحه Next را انتخاب کنید.

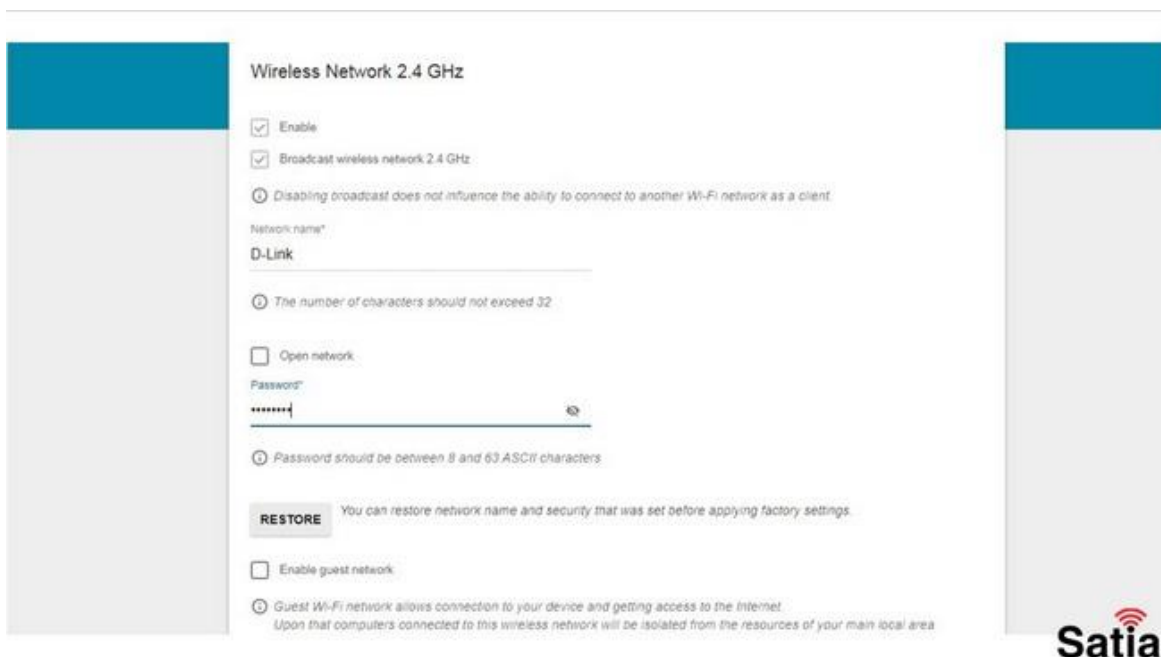

۶- همانند تصاویر در هر دو مرحله بعدی بدون زدن تیک گزینه‌ها، روی دکمه Next را کلیک کرده تا به مرحله تغییر رمز پیکربندی مودم برسید.

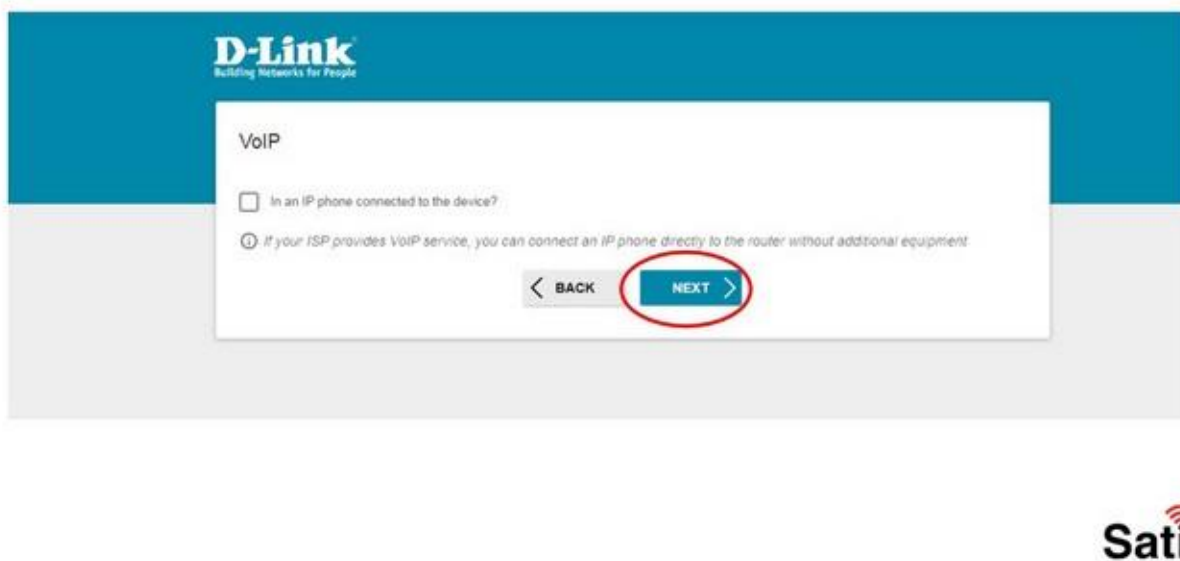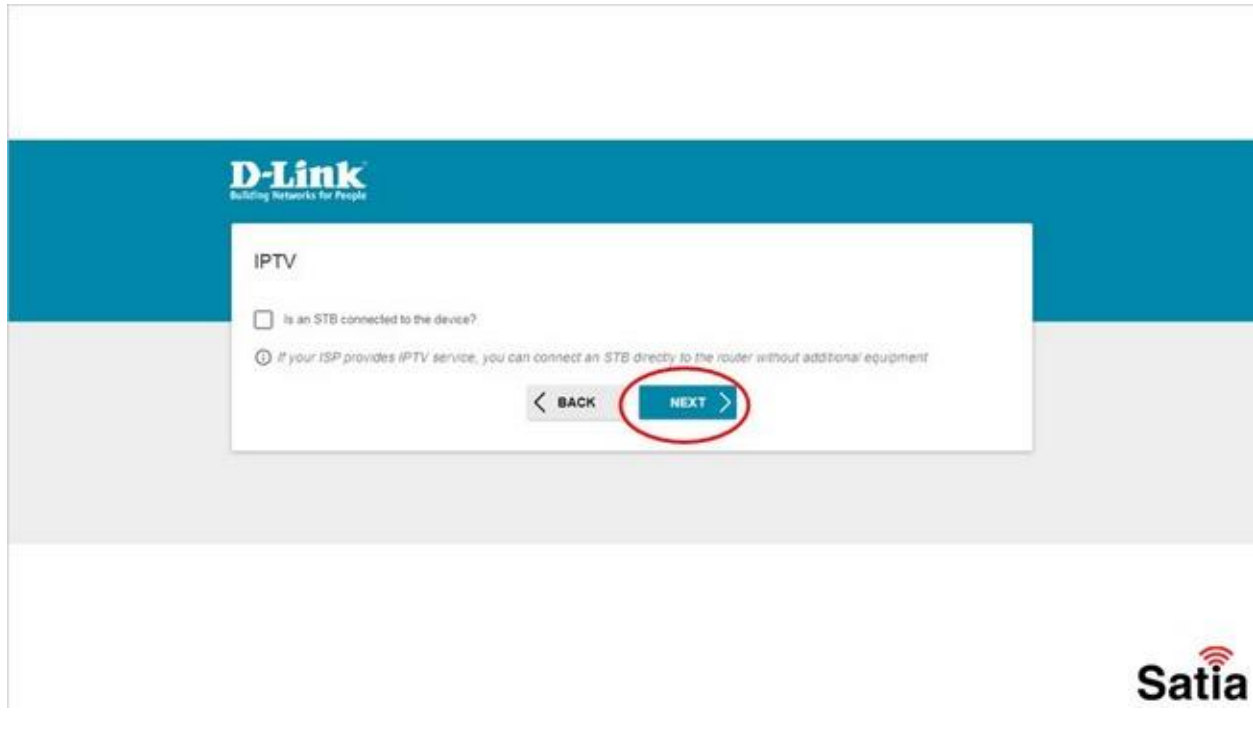


۷- در این مرحله لازم است تا کلمه عبور جدیدی برای محیط پیکربندی مودم تنظیم کنید. با وارد کردن کلمه عبور جدید روی دکمه Next کلیک کنید.

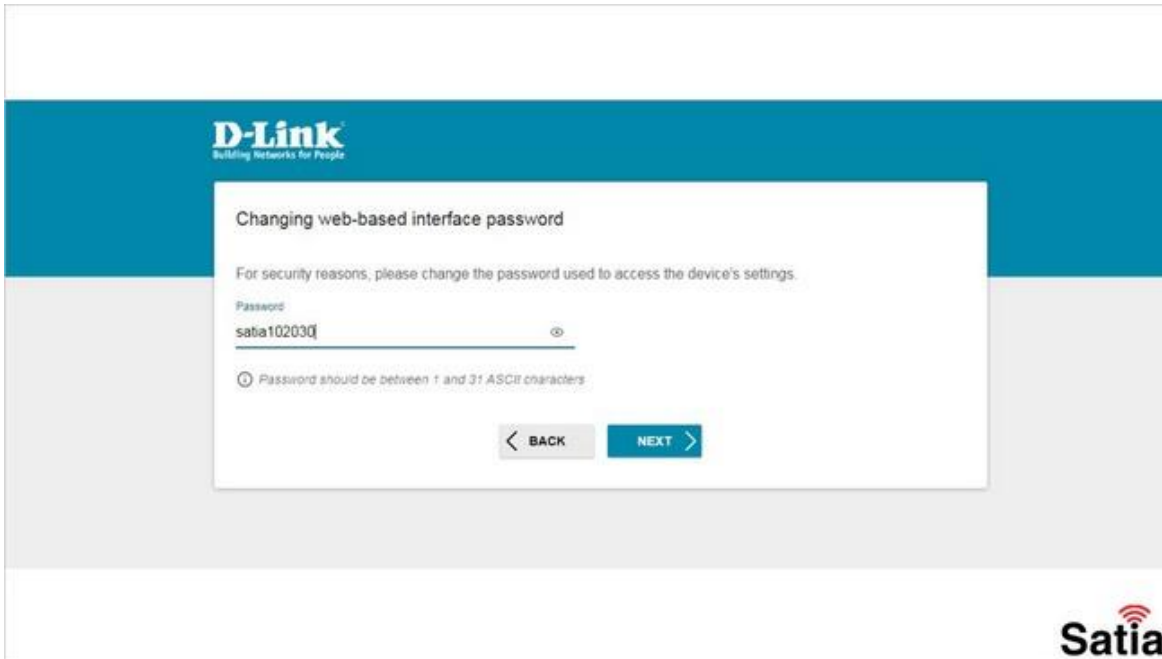

The screenshot shows the D-Link web interface for changing the web-based interface password. The title is "Changing web-based interface password". Below the title, there is a message: "For security reasons, please change the password used to access the device's settings." There is a password input field with the text "sata102030" and a toggle icon. Below the input field, there is a note: "Password should be between 1 and 31 ASCII characters". At the bottom of the form, there are two buttons: "BACK" and "NEXT".

۸- در گام آخر با دیدن صفحه کانفیگ مودم روی دکمه Apply کلیک کنید تا تغییرات اعمال و پیکربندی مودم کامل شود.

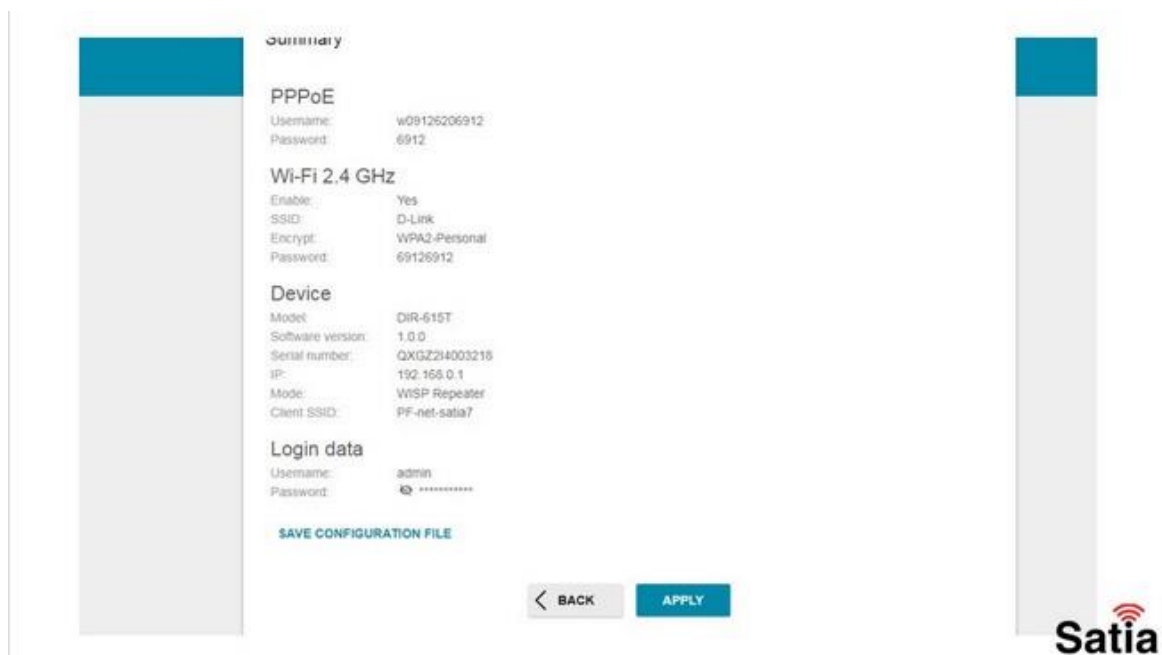

The screenshot shows the D-Link web interface displaying the configuration summary for the modem. The title is "Summary". The configuration is divided into several sections:

- PPPoE**
 - Username: w09126206912
 - Password: 6912
- Wi-Fi 2.4 GHz**
 - Enable: Yes
 - SSID: D-Link
 - Encrypt: WPA2-Personal
 - Password: 69126912
- Device**
 - Model: DIR-615T
 - Software version: 1.0.0
 - Serial number: QXGZ214003216
 - IP: 192.168.0.1
 - Mode: WISP Repeater
 - Client SSID: PF-net-satia7
- Login data**
 - Username: admin
 - Password: [masked]

At the bottom of the summary, there is a button labeled "SAVE CONFIGURATION FILE". Below the summary, there are two buttons: "BACK" and "APPLY".

