


برای کانفیگ مودم (روتر) توتولینک مدل A2004NS مراحل زیر را به ترتیب انجام دهید.


۱- در گام نخست لازم است تا با وارد کردن آدرس ۱۹۲,۱۶۸,۱,۱ در مرورگر خود وارد محیط اولیه پیکربندی مودم شده و در این قسمت روی گزینه Setup Tool کلیک کنید.



۲- حال با وارد کردن نام کاربری و کلمه عبور (پیش فرض admin-admin) مودم، محیط پیکربندی مودم ظاهر می‌شود.

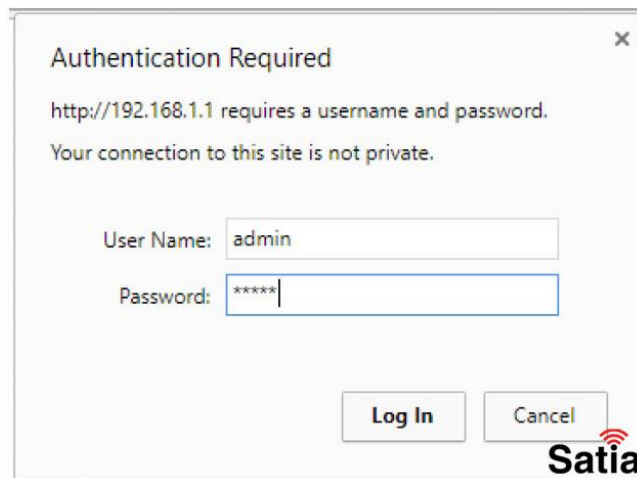


۳- از صفحه باز شده همانند تصویر زیر ابتدا از ستون سمت چپ Advanced Setup، سپس Wireless (2.4GHz) و در انتها Wireless Multibridge را انتخاب نمایید. در صفحه باز شده در سمت راست ابتدا رمزگذاری WPA2PSK/WPA2PSK+TKIP/AES را انتخاب کرده و بعد دکمه Use Wireless Bridge را انتخاب بزنید. در انتها برای سرچ کردن دکل‌های موجود روی گزینه AP Scan کلیک کنید.

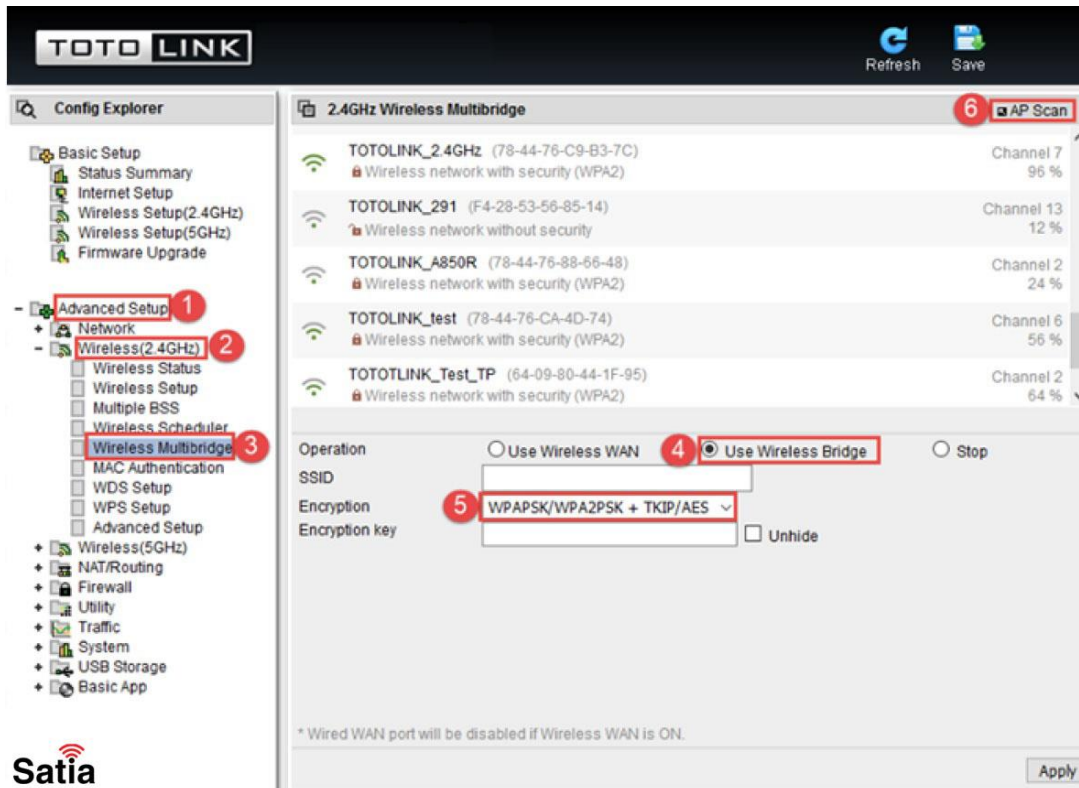

The screenshot shows the TOTO LINK web interface. On the left, the 'Config Explorer' sidebar is visible, with 'Advanced Setup' (1) expanded to show 'Wireless(2.4GHz)' (2) and 'Wireless Multibridge' (3) selected. The main content area is titled '2.4GHz Wireless Multibridge' and features an 'AP Scan' button (6). Below this, there is a list of detected wireless networks with their SSIDs, MAC addresses, channels, and security status. At the bottom, the 'Operation' section has 'Use Wireless Bridge' (4) selected, and the 'Encryption' dropdown is set to 'WPA2PSK/WPA2PSK + TKIP/AES' (5). An 'Apply' button is located at the bottom right.

۴- در این مرحله اسکن دکل‌های روستا انجام می‌شود. با توجه به لیست، قوی‌ترین آنتن را انتخاب و کلمه عبور (رمز) آن را وارد نمایید. برای رفتن به مرحله بعد دکمه Apply را انتخاب نمایید تا تنظیمات انجام شده و مودم به اینترنت متصل شود.

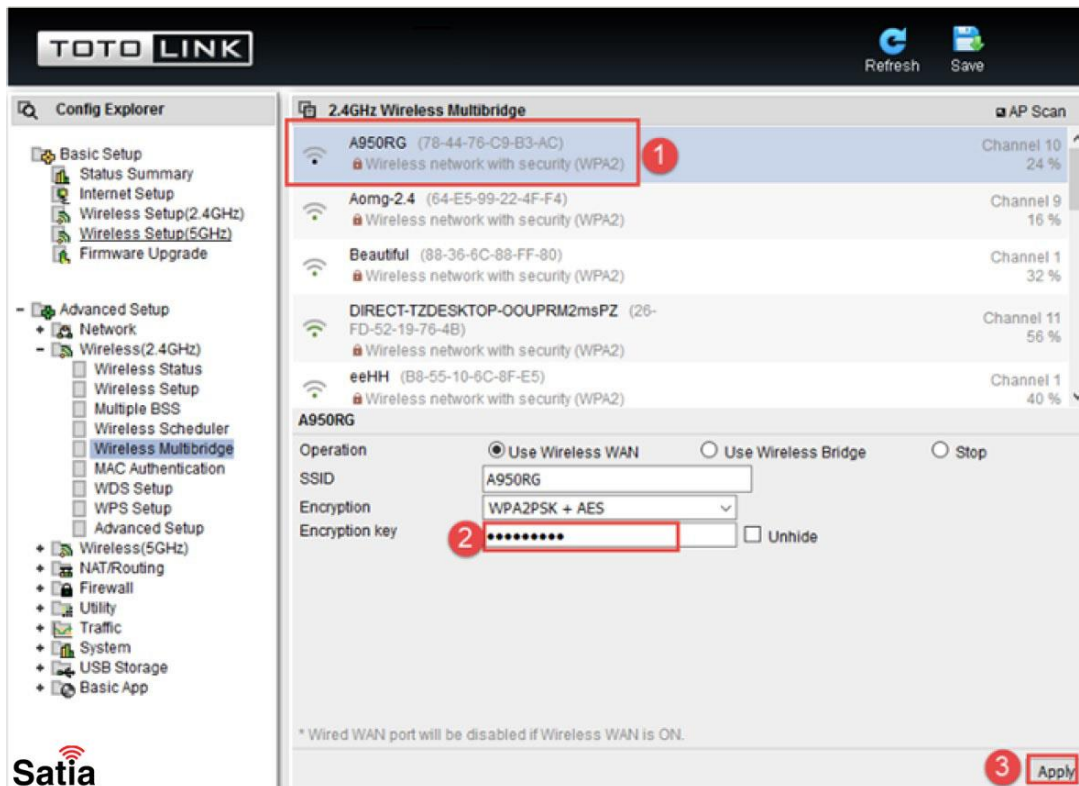

The screenshot shows the TOTO LINK web interface. On the left is a 'Config Explorer' sidebar with categories like 'Basic Setup' and 'Advanced Setup'. The main area is titled '2.4GHz Wireless Multibridge' and displays a list of wireless networks. The first network, 'A950RG (78-44-76-C9-B3-AC)', is selected and highlighted with a red box and a '1'. Below this list, the configuration for 'A950RG' is shown. The 'Operation' section has 'Use Wireless WAN' selected. The 'SSID' is 'A950RG'. The 'Encryption' is set to 'WPA2PSK + AES'. The 'Encryption key' field contains a masked key (represented by dots) and is highlighted with a red box and a '2'. At the bottom right, there is an 'Apply' button highlighted with a red box and a '3'. A note at the bottom states: '\* Wired WAN port will be disabled if Wireless WAN is ON.'