


برای پیکربندی مودم دی لینک مدل ۲۷۵۰U مراحل زیر را به ترتیب انجام دهید:



Satia

- ۱- مرورگر خود را باز کرده و با نوشتن آدرس ۱۹۲,۱۶۸.۱.۱ وارد صفحه لاگین مودم شوید.
- ۲- با وارد کردن نام کاربری و کلمه عبور) به صورت پیشفرض هر دو admin هستند (وارد محیط پیکربندی مودم خواهید شد.

Product Page: DSL-2750U Firmware Version:ME\_1.09

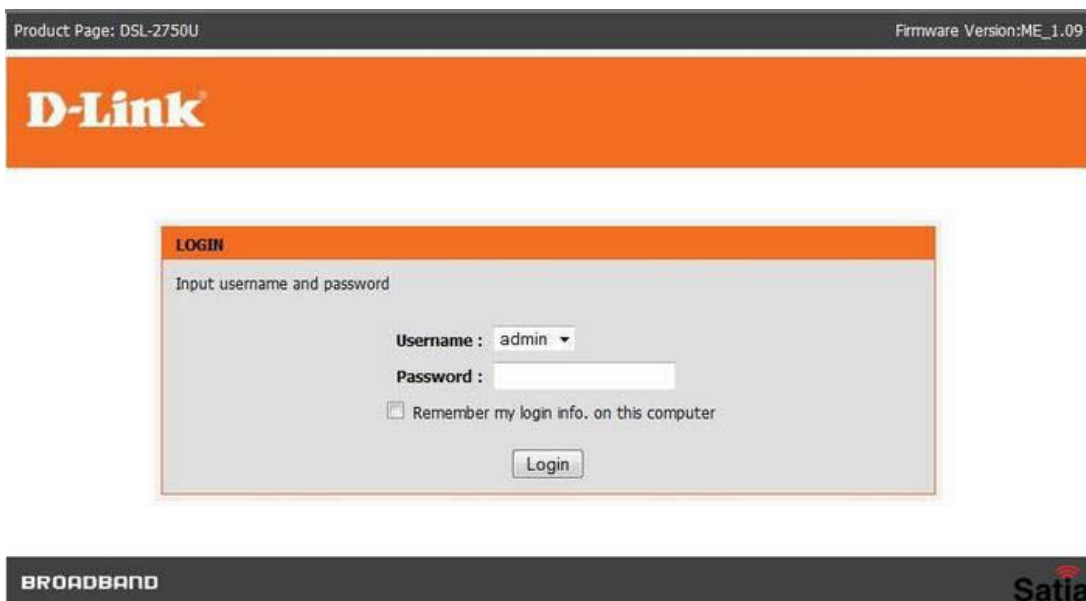

**D-Link**

**LOGIN**

Input username and password

Username : admin


Password :

Remember my login info. on this computer


Login

BROADBAND Satia


۳- پس از ورود، تب (زبان) Setup را انتخاب و روی دکمه Setup Wizard کلیک کنید تا فرآیند پیکربندی مودم آغاز شود.

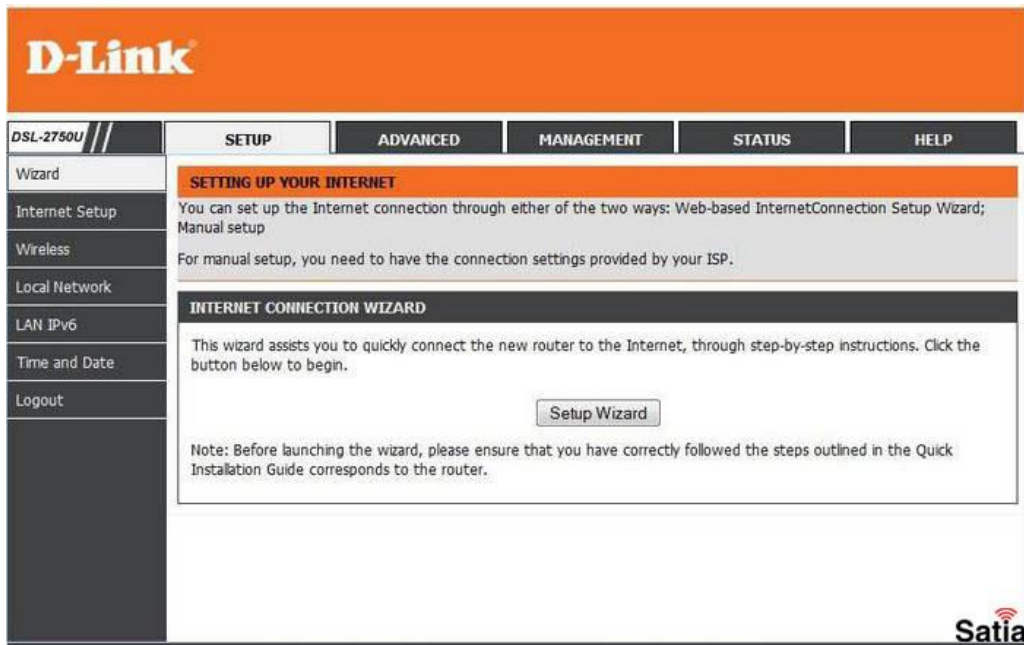

۴- با انجام ۵ مرحله پیش رو کانفیگ مودم شما انجام خواهد شد.

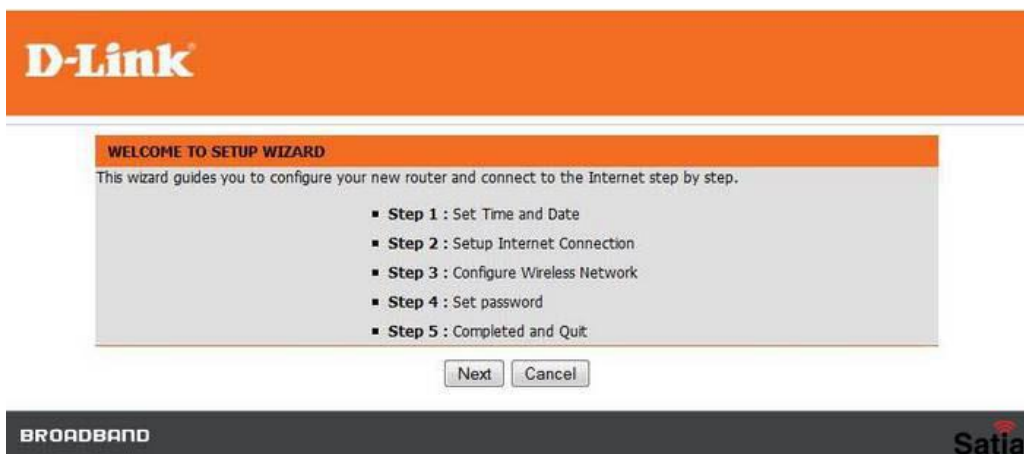

۵- در نخستین گام لازم است تا تاریخ و ساعت مودم را تنظیم نمایید. به این منظور همانند تصویر منطقه زمانی را تهران و تیک `Automatically adjust clock for daylight saving changes` و `Automatically synchronize with internet time server` را بزنید. سپس روی دکمه Next کلیک کنید.

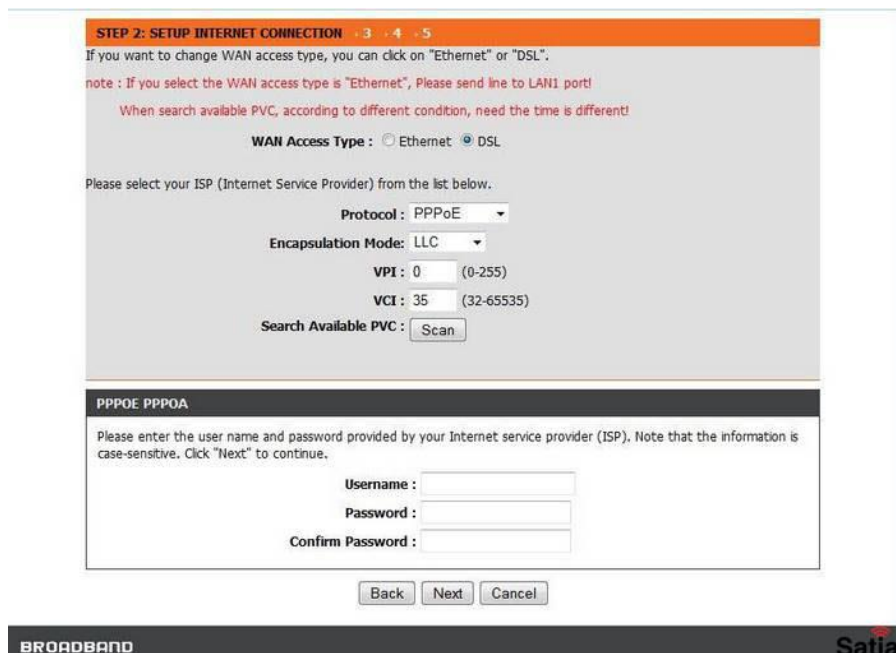

**STEP 2: SETUP INTERNET CONNECTION** 3 4 5

If you want to change WAN access type, you can click on "Ethernet" or "DSL".

note : If you select the WAN access type is "Ethernet", Please send line to LAN1 port!

When search available PVC, according to different condition, need the time is different!

WAN Access Type :  Ethernet  DSL

Please select your ISP (Internet Service Provider) from the list below.

Protocol : PPPoE

Encapsulation Mode: LLC

VPI : 0 (0-255)

VCI : 35 (32-65535)

Search Available PVC :

---

**PPPOE PPPOA**

Please enter the user name and password provided by your Internet service provider (ISP). Note that the information is case-sensitive. Click "Next" to continue.


Username :

Password :

Confirm Password :

BROADBAND Satia

۶- در صفحه جدید بایستی نوع اینترنت و تنظیمات مربوط به آن را وارد کنید. ابتدا نوع اینترنت در قسمت WAN Access Type را DSL انتخاب کرده و در قسمت‌های بعدی مطابق تصویر، تنظیمات را انجام دهید. در باکس پایین صفحه PPPOE PPPOA لازم است تا شماره تلفن ADSL خود را در بخش Username و کلمه عبوری که از طرف ارائه دهنده اینترنت برای شما ارسال شده را در بخش Password وارد نمایید. در انتها با کلیک روی دکمه Next وارد مرحله بعدی شوید.

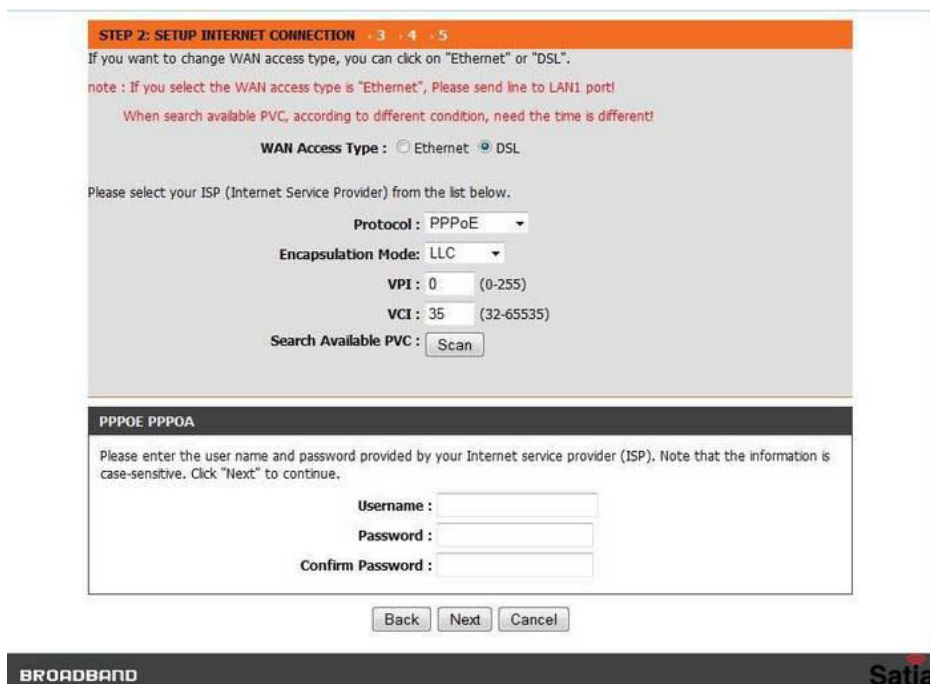

**STEP 2: SETUP INTERNET CONNECTION** 3 4 5

If you want to change WAN access type, you can click on "Ethernet" or "DSL".

note : If you select the WAN access type is "Ethernet", Please send line to LAN1 port!

When search available PVC, according to different condition, need the time is different!

WAN Access Type :  Ethernet  DSL

Please select your ISP (Internet Service Provider) from the list below.

Protocol : PPPoE

Encapsulation Mode: LLC

VPI : 0 (0-255)

VCI : 35 (32-65535)

Search Available PVC :

---

**PPPOE PPPOA**

Please enter the user name and password provided by your Internet service provider (ISP). Note that the information is case-sensitive. Click "Next" to continue.

Username :


Password :

Confirm Password :

BROADBAND Satia

۷- در این مرحله بایستی تنظیمات مربوط به شبکه وای فای مودم خود را انجام دهید که شامل نامگذاری روی مودم، مخفی کردن نام مودم و رمزگذاری رو آن می‌شود.

با زدن تیک **Enable Your Wireless Network** شبکه وای شما فعال می‌شود. سپس در بخش SSID می‌توانید نام مودم خود را تغییر دهید. هنگام جستجو شبکه وای فای در دستگاه‌های مختلف مودم شما با این نام نمایش داده می‌شود. در بخش **Visibility Status** می‌توانید انتخاب کنید نام وای فای شما در لیست جستجوی وای فای نمایش داده شود یا خیر. با انتخاب **Visible** نام وای فای نمایش داده خواهد شد.

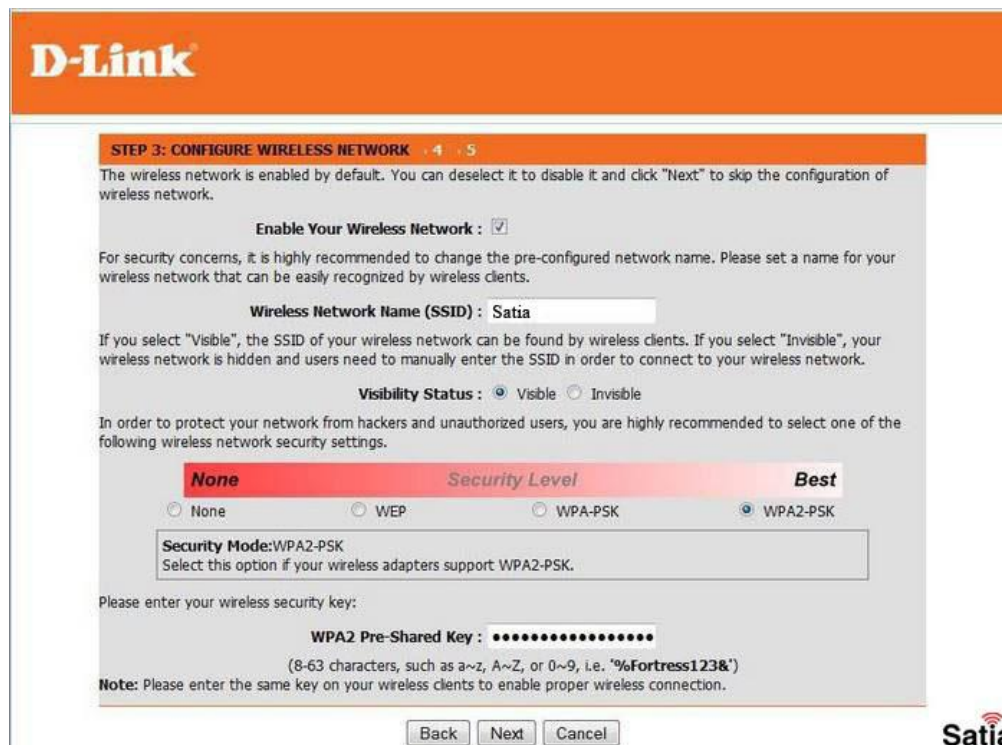

**D-Link**

**STEP 3: CONFIGURE WIRELESS NETWORK** 4 5

The wireless network is enabled by default. You can deselect it to disable it and click "Next" to skip the configuration of wireless network.

**Enable Your Wireless Network:**

For security concerns, it is highly recommended to change the pre-configured network name. Please set a name for your wireless network that can be easily recognized by wireless clients.

**Wireless Network Name (SSID):** Satia

If you select "Visible", the SSID of your wireless network can be found by wireless clients. If you select "Invisible", your wireless network is hidden and users need to manually enter the SSID in order to connect to your wireless network.

**Visibility Status:**  Visible  Invisible

In order to protect your network from hackers and unauthorized users, you are highly recommended to select one of the following wireless network security settings.

None	Security Level		Best
<input type="radio"/> None	<input type="radio"/> WEP	<input type="radio"/> WPA-PSK	<input checked="" type="radio"/> WPA2-PSK

**Security Mode:** WPA2-PSK  
Select this option if your wireless adapters support WPA2-PSK.

Please enter your wireless security key:

**WPA2 Pre-Shared Key:** ●●●●●●●●●●

(8-63 characters, such as a~z, A~Z, or 0~9, i.e. '%Fortress123&')


**Note:** Please enter the same key on your wireless clients to enable proper wireless connection.

**Satia**

در مطلب [مخفی کردن نام مودم و اتصال به آن](#)، نحوه اتصال به شبکه‌های مخفی را شرح دادیم.

در بخش نهایی که مربوط به رمزگذاری روی وای فای مودم است گزینه WPA2-PSK را برای حداکثر امنیت انتخاب و در باکس WPA2 Pre-Shared Key کلمه عبور خود را وارد نمایید. در انتها روی دکمه Next کلیک کنید.

۸- در گام بعدی می‌توانید کلمه عبور صفحه تنظیمات مودم را تغییر دهید. در صورتی که تمایل به تغییر آن ندارید روی دکمه Skip کلیک کنید.

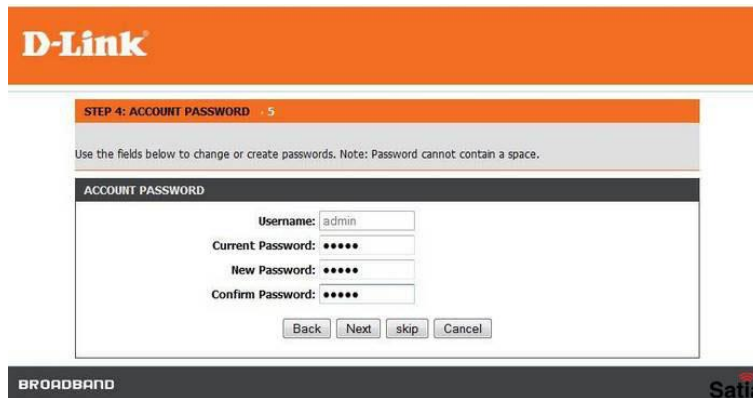

**D-Link**

**STEP 4: ACCOUNT PASSWORD** 5

Use the fields below to change or create passwords. Note: Password cannot contain a space.

**ACCOUNT PASSWORD**

Username: admin

Current Password: ●●●●


New Password: ●●●●

Confirm Password: ●●●●

Back Next skip Cancel

**BROADBAND** Satia

۹- در صفحه آخر به شما خلاصه‌ای از تغییرات اعمال شده را نشان می‌دهد. با کلیک روی دکمه Apply مودم شما ری استارت، تغییرات اعمال و شما به اینترنت متصل خواهید شد.

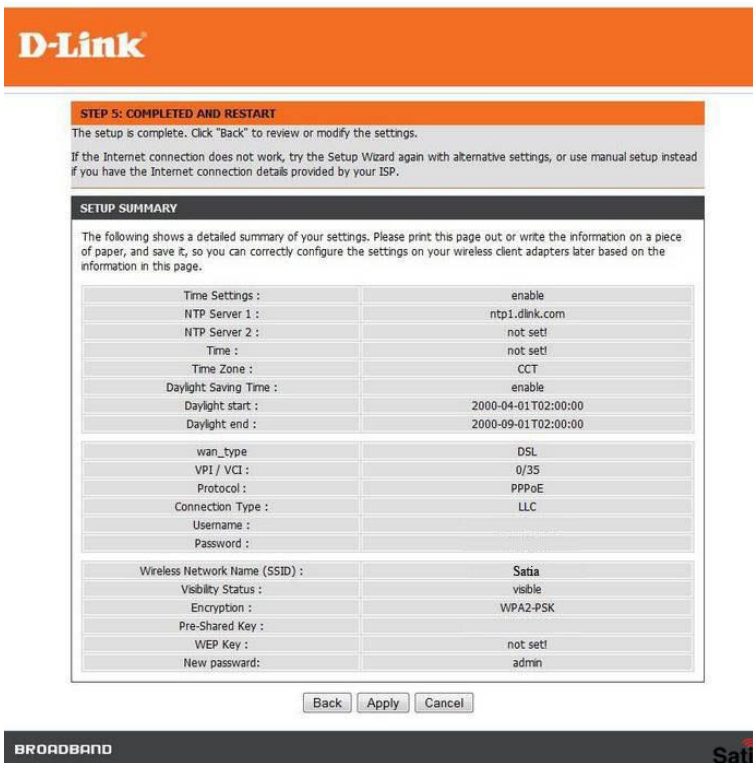

**D-Link**

**STEP 5: COMPLETED AND RESTART**

The setup is complete. Click "Back" to review or modify the settings.

If the Internet connection does not work, try the Setup Wizard again with alternative settings, or use manual setup instead if you have the Internet connection details provided by your ISP.

**SETUP SUMMARY**

The following shows a detailed summary of your settings. Please print this page out or write the information on a piece of paper, and save it, so you can correctly configure the settings on your wireless client adapters later based on the information in this page.

Time Settings :	enable
NTP Server 1 :	ntp1.dlink.com
NTP Server 2 :	not set!
Time :	not set!
Time Zone :	CCT
Daylight Saving Time :	enable
Daylight start :	2000-04-01 T02:00:00
Daylight end :	2000-09-01 T02:00:00
wan_type :	DSL
VPI / VCI :	0/35
Protocol :	PPPoE
Connection Type :	LLC
Username :	admin
Password :	admin
Wireless Network Name (SSID) :	Satia
Visibility Status :	visible
Encryption :	WPA2-PSK
Pre-Shared Key :	
WEP Key :	not set!
New password:	admin

Back Apply Cancel

**BROADBAND** Satia



**D-Link**

Set in....., please wait for the process

**BROADBAND** Satia